



MICROSWITCH BRACKET - 16520NOS

16520NOS Microswitch Bracket Installation (4500 Series Holley Carburetors)

In your packaging, you will find the billet aluminum microswitch bracket, microswitch, and the mounting hardware for the microswitch. The 4500 series bracket typically installs on the driver's side rear carburetor stud (**Figure 1**). Loosely install the microswitch to the bracket. Once installed, move the linkage to WOT (Wide Open Throttle) and adjust the microswitch to the desired engagement position. Tighten the carburetor nut and then the microswitch screws. Verify switch adjustment by moving the throttle linkage to WOT ensuring proper activation.



Figure 1 – Microswitch Bracket Placement



Figure 2 – Proper Microswitch Engagement at Wide Open Throttle

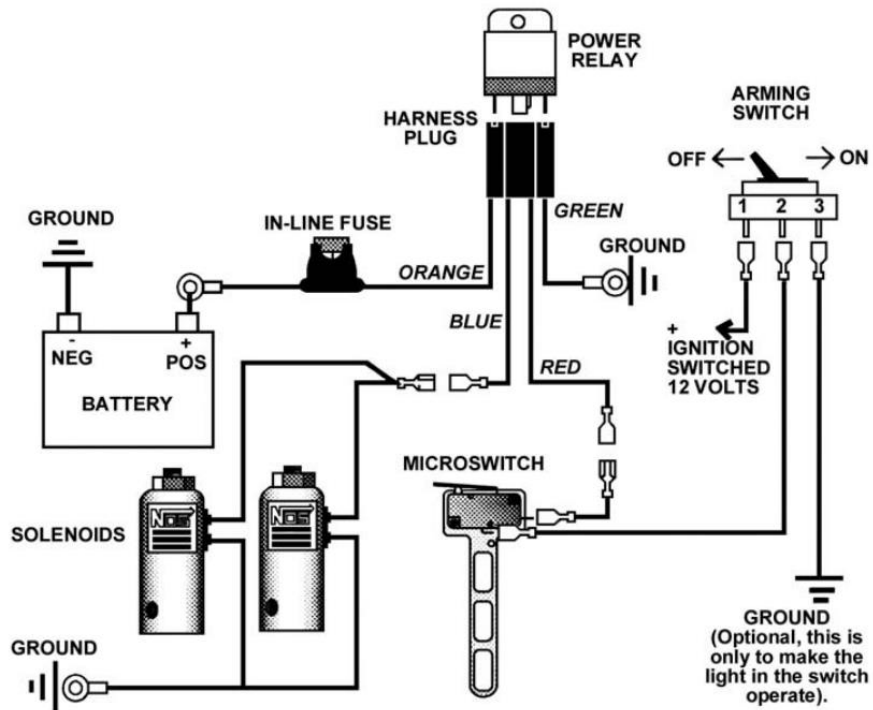


Figure 3 – Microswitch Wiring

Technical Support: 1-866-464-6553

© 2018 NOS. All Rights Reserved. Tous Droits Réservés.

199R11584
Date: 5-14-18