

In-Line Filter

DWFF160

(8-03-160-100k, 8-03-160-010k)



DW fuel filters are compatible with a wide range of fuels including pump gas, race gas, MTBE, ethanol, methanol, and diesel. DW recommends a maximum service interval of 12 months or 12,000 miles. Shorter service intervals are recommended with harsher conditions and corrosive fuels.


- Stainless Steel 10 or 100 Micron
- -8AN ORB Inlet/Outlet
- 110mm Length
- Universal Fitment



Specifications


Weight	13.9 oz (395 grams)
External Materials	Anodized T6061 Aluminum
Inlet Fitting	-8 AN ORB
Outlet Fitting	-8 AN ORB
Sealing	Viton O-rings
Mechanical Filtration	304 Stainless Steel Mesh
Magnetic Filtration	35mm Neodymium Ring
Flow Rating (10 μ)	1,000 LPH
Flow Rating (100 μ)	>1,000 LPH
Avg Surface Area	65 sq in

Pressure Drop

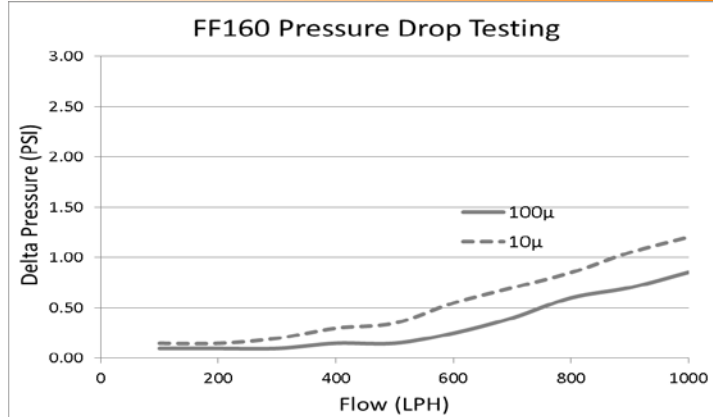

LPH	200	300	400	500	600	700	800	900
10 μ	0.15	0.20	0.30	0.35	0.55	0.70	0.85	1.05
100 μ	0.10	0.10	0.15	0.15	0.25	0.40	0.60	0.70

Dimensions

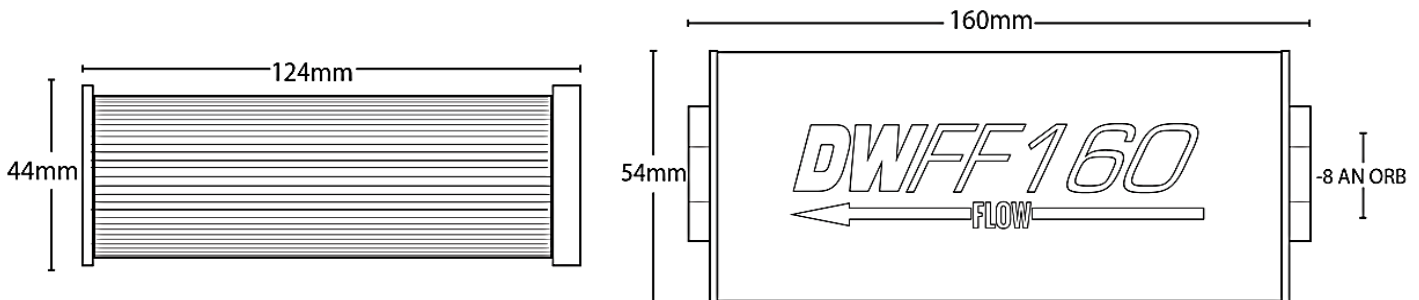

THIS PRODUCT MAY BE USED SOLELY ON VEHICLES USED IN SANCTIONED COMPETITION WHICH MAY NEVER BE USED UPON A PUBLIC ROAD OR HIGHWAY, UNLESS PERMITTED BY SPECIFIC REGULATORY EXEMPTION