


INSTALLATION INSTRUCTIONS

Polaris RZR 2 and 4 seat

PART #902401

9 Black Heat Shields
1 Roll Black Seam Tape

NOTES:

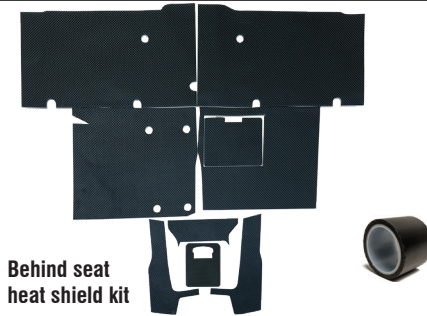


SURFACE PREP:

Vacuum or wipe down installation area to remove all loose debris/dust. Then clean with isopropyl alcohol to remove any contaminants.

TOOLS:

Use manufacturer's suggested tools for panel removal. Cleaner/Degreaser, Cloth, Scissors, Side Cutters

1. Remove seats per factory directions and set aside.

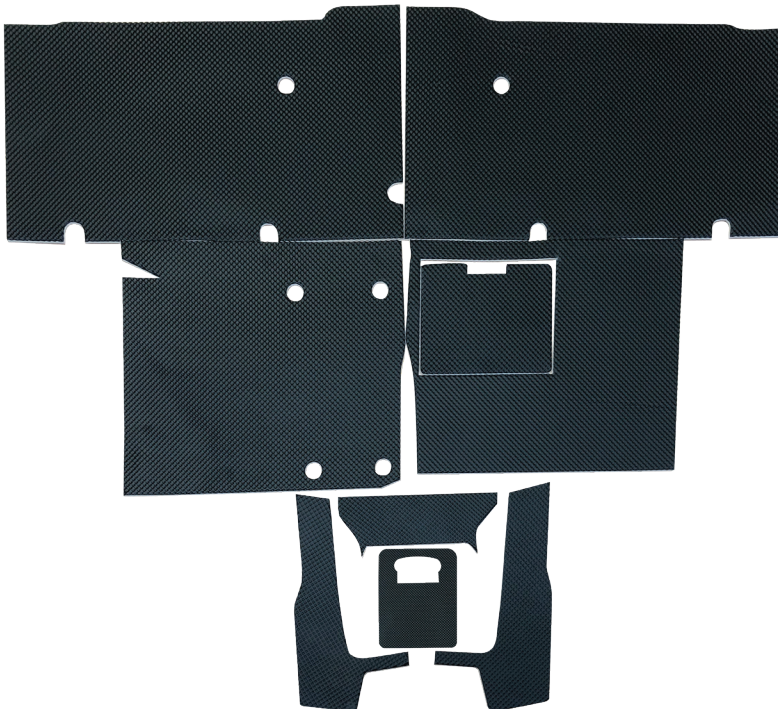

2. Lay out the 8 black heat shields as seen in Fig 1.

3. Clean the area where the shields will be installed making sure to remove any dirt or grease.

Figure 1

4. Test fit each part into place before removing the release liner. Once you have all the parts fit, you can remove a small portion of the release liner and place the shield into place, making sure it is aligned properly. Once in place remove the rest of the liner and press firmly to adhere. Be careful to make sure the shield is correctly placed as the adhesive is very aggressive and once in place it will be hard to remove.

5. Continue with the remaining shields.

6. Reinstall the seats

