



INSTALLATION GUIDE

2021+ BMW G80 M3 Oil Cooler

SKU: MMOC-G80-21

TABLE OF CONTENTS

- Pg 1** RESOURCES AND CONTACT INFORMATION
- Pg 2** IMPORTANT SAFETY INFORMATION
 - SUPPLIED PARTS
 - REQUIRED TOOLS
 - INSTALLATION INSTRUCTIONS
- Pg 4** DISPOSAL INSTRUCTIONS
- WARRANTY INFORMATION

RESOURCES & CONTACT

-  **CALL 1-877-GOMISHI**
CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST
-  **MISHIMOTO**
-  **GOMISHIMOTO**
-  **MISHIMOTO**
-  **WEBSITE**
WWW.MISHIMOTO.COM
-  **ENGINEERING BLOG**
WWW.MISHIMOTO.COM/ENGINEERING

IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the installation of our products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

REQUIRED TOOLS

5/16 DRILL BIT	T20 TORX
DRILL	1 QUART OF OIL
¼" 10MM SOCKET	(SEE MANUFACTURER
¼ RATCHET	SPECIFICATIONS FOR TYPE)
10MM WRENCH	PICK TOOL

INSTALLATION INSTRUCTIONS

01. Remove forward guard, and splash shield (25x bolts)



02. Drill out rivets to remove 2x oil cooler bash guards.



03. Remove 2x oil line fitting hold down bolts, and 1x bolt holding the line in place. Pull rearward on lines to remove. (Some oil will drain out during this process)

04. Remove 2x Oil Cooler hold down bolts.



Continued on next page

05. Transfer weather stripping, and mounting brackets to the Mishimoto oil cooler. **NOTE: Mounting brackets can be mounted backwards and upside down, be sure to install them in the correct orientation.**



06. Install Mishimoto cooler in stock location. Install supplied brackets as shown before installing oil cooler bracket. This will allow for the bash guard to be bolted on.




07. Bolt oil cooler bash guard, to bracket from step 6 using supplied M6 bolt.



08. Replace oil cooler line O-rings with supplied O-rings.

09. Install oil cooler lines using supplied M6 hold down bolts, and mount oil line bracket with M6 bolt and locking nut.

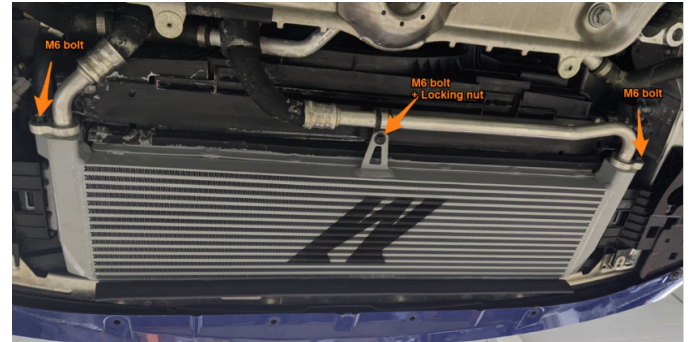

10. Reinstall lower splash shield, and forward guard from step 1.



11. Refill oil according to manufacturer specifications.

Congratulations! You have finished your installation.

DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals.

WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.

- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on [Mishimoto.com](https://www.mishimoto.com) in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.
- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



WARNING
Cancer and
Reproductive Harm
www.P65Warnings.ca.gov

This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: www.p65warnings.ca.gov