

INSTRUCTION SHEET FOR SET #5.10103

Read this instruction sheet thoroughly before initiating any work!

It is recommended that if you are unfamiliar with this type of work that you refer to a qualified service center specializing in this type of work. It is also recommended that if you choose to do this work yourself that a factory service manual be obtained for the proper procedures pertaining to removal, replacement and proper torque specifications for your vehicle. This instruction set is intended as a guideline for the safe installation of Energy Suspension's Polyurethane.



1131 VIA CALLEJON, SAN CLEMENTE, CA 92673

© 2005 Energy Suspension. All rights reserved.
May not be reproduced, in any form, or by any means,
without the written consent of Energy Suspension.

Only move rack
forward enough
to remove the
bushings!


PARTS LIST:

- 4 - 2610 Rack bushings (0.165" flange)
- 1 - 17459 Instruction sheet

The rack is held on by two bolts. There is a nut/sleeve on the forward side of the rack. **(A)** Remove this nut/sleeve. Now remove the rear sleeve. **(C)** Using a pry bar against the flange of the bushings, remove the OEM rubber bushings.

INSTALLATION

Install Energy Suspension bushings. **(B)** This is a non-rotating part, there is no need to grease the bushings. Once the bushings are installed, insert the sleeve from the back side. Then insert the nut/sleeve. Now push the bolt thru and tighten to factory specifications. The procedure is the same for both sides.

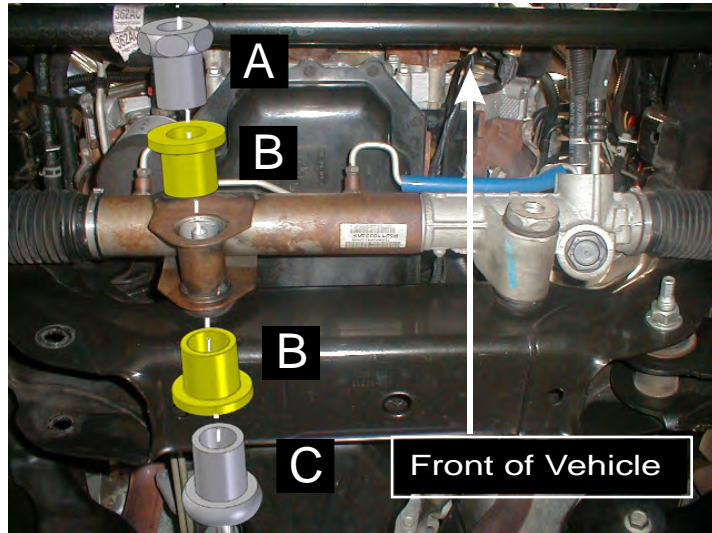

17459

090105

INSTRUCTION SHEET FOR SET #5.10103

Read this instruction sheet thoroughly before initiating any work!

It is recommended that if you are unfamiliar with this type of work that you refer to a qualified service center specializing in this type of work. It is also recommended that if you choose to do this work yourself that a factory service manual be obtained for the proper procedures pertaining to removal, replacement and proper torque specifications for your vehicle. This instruction set is intended as a guideline for the safe installation of Energy Suspension's Polyurethane.



1131 VIA CALLEJON, SAN CLEMENTE, CA 92673

© 2005 Energy Suspension. All rights reserved.
May not be reproduced, in any form, or by any means,
without the written consent of Energy Suspension.

Only move rack
forward enough
to remove the
bushings!


PARTS LIST:

- 4 - 2610 Rack bushings (0.165" flange)
- 1 - 17459 Instruction sheet

The rack is held on by two bolts. There is a nut/sleeve on the forward side of the rack. **(A)** Remove this nut/sleeve. Now remove the rear sleeve. **(C)** Using a pry bar against the flange of the bushings, remove the OEM rubber bushings.

INSTALLATION

Install Energy Suspension bushings. **(B)** This is a non-rotating part, there is no need to grease the bushings. Once the bushings are installed, insert the sleeve from the back side. Then insert the nut/sleeve. Now push the bolt thru and tighten to factory specifications. The procedure is the same for both sides.

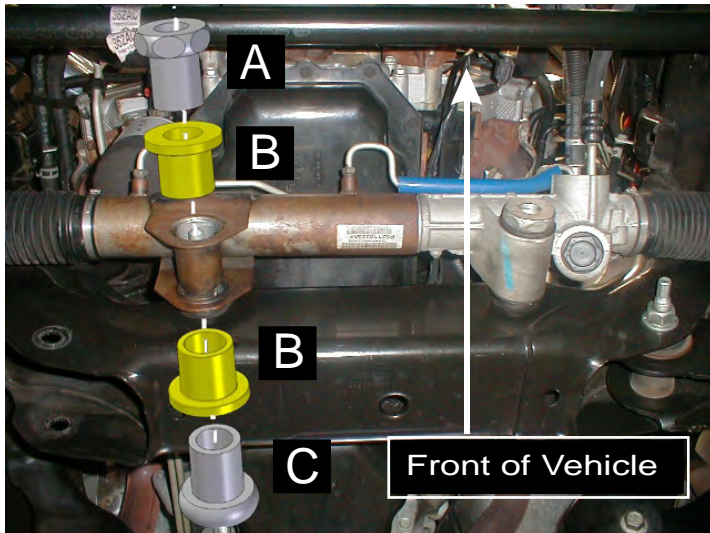

17459

090105